

Moving Test – MT551

Three phase Current and Voltage Source




Current generation up to 120 A
Voltage generation up to 500 V

General

While testing of metering installations on-site you can meet the problem, that you cannot make a proper testing because of insufficient load conditions.

The three phase MT551 power source is a lightweight and portable current and voltage source based on newest technology and serves for solving this problem by simulating the required load conditions.

Operation is performed by integrated 10,4" touch screen or externally via interfaces.

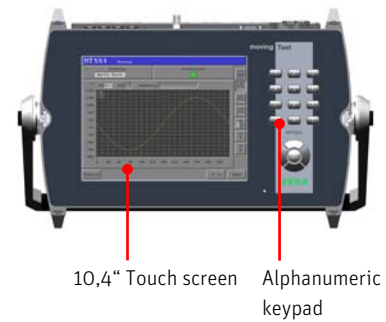


Features

- Three phase current generation up to 120 A (AC)
- Three phase voltage generation up to 500 V
- 10,4 " colour-display
- Compact-Flash card
- Easy user-guidance via touch screen
- All test values are generated synthetically.
- The power source MT551 can be used as stand-alone unit or as enhancement of the MT3000/MT365 reference standard.
- Interfaces: Bluetooth, USB or RS232
- Powerful unit with single phase mains supply.



Functions

- Individual load point settings
- Programmable phase shift control from 0 ... 360°
- Programmable power factors
- Configuration of balanced and unbalanced load points
- Simulation of load conditions via adjustable currents, voltages and angles.

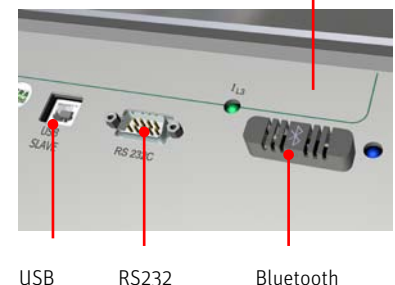

Data management

In addition to generating test values MT551 source also provides the measurement of these values (0,2 %). All values will be displayed and can be stored.

Load points and measured data can be stored on the CF-card. The data management software MTVis provides the ability to transfer the data between MT551 and an external PC. Measured values can be summarized and printed in a test report.

Load Point Setting

The portable source provides an individual load point programming to simulate the load.

- Voltage and current generation facilities can be programmed independently from each other.
- Power factor programming between voltage and current circuit.
- Phase angle programming between the voltage and current phases from 0 to 360°.
- Test frequency setting from synthetic or synchronized to the mains.
- All values are shown numeric and graphic in a vector diagram.
- The generated values are stabilized by analogue control



Actual Values

The generated AC system will be measured after switching on.

Actual values are displayed simultaneously in a summary:

- RMS values of voltage and current
- Phase angle between voltage and current
- Active, reactive and apparent power
- Test frequency
- Power factor ($\cos \phi$)
- Total power for active, reactive and apparent power
- Total power factor
- Rotary field
- Vectorial diagram (small)



Vectorial Display

The vectorial display serves for visualization and documentation of the generated currents and voltages.


All measured values can be stored on the CF card.



Curve Display

Two channels of the generated currents and voltages can be measured and displayed simultaneously.

The curves can be stored on the CF card.

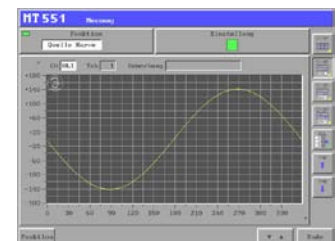

Technical Data

Portable Power Source MT551

General	
Power supply	85 ... 265 VAC, 47... 63 Hz
Power consumption	ca. 500 VA
Temperature range, operation	-15° ... + 45° C
Relative humidity (not condensing)	max. 95 %
Maße (LxBxH)	321 x 448 x 310 mm
Dimensions (DxWxH)	approx. 19,5 kg

Safety	
Measuring category acc. to EN61010-1:2001	600 V CAT I
IP class accord. to DIN EN 60529	IP40
Declaration	CE conform

Quelle	
Voltage min. max.	40 V ... 500 V
Voltage max. output power ³	30 VA
Voltage distortion factor	< 0,5 %
Voltage resolution	0,01 %
Voltage accuracy ¹	0,2 %
Current min. max.	1 mA ... 120 A
Current max. output power ³	60 VA
Current distortion factor	< 0,5 %
Current resolution	0,01 %
Current accuracy ²	0,2 %
Frequency resolution	0,01 Hz
Frequency accuracy	0,01 Hz
Frequency range	45 ... 65 Hz
Phase angle resolution	0,01°
Phase angle accuracy	0,1°
Phase angle range	0 ... 359,99°

Status: 17th May 2011

1 from 40 V to 500 V

2 from 50 mA to 120 A

3 related of end of maximum range